

PTC4980


Polymer Thick Film

Description

PTC4980 ink is formulated as a self-regulating positive thermal coefficient (PTC) resistor for low temperature heater applications with operating temperatures 70 – 90°C. High and low resistance formulations can be provided allowing customized solutions for heater design by blending the materials. Target resistances and temperatures can be optimized within this range.

Key Features

- Fast heating time to operating temperature
- Excellent thermal stability and lifetime
- High response rate
- ≥ 20x resistance shift at 110 °C
- Compatible with commercially available adhesives

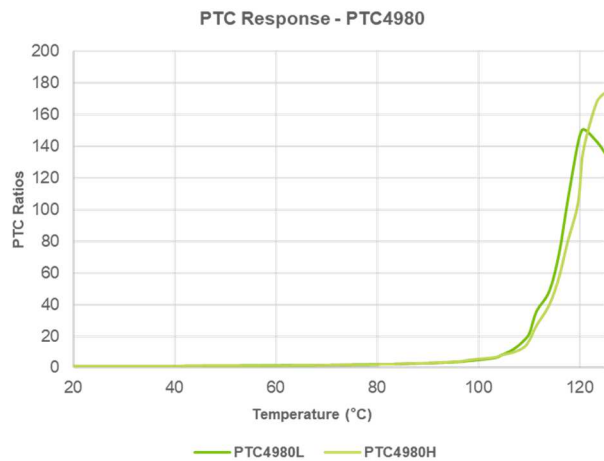

Typical Properties

Resistivity	Adjustable between 3 - 15 kOhm / sq.
Non-Volatile	(1hr @ 150 °C) 40 – 50 %
Viscosity	50 – 150 Kcps, Brookfield HBT DVIII, #14 spindle in utility cup @ 10 rpm, 25 °C
Color	Dark grey / black

Recommended Processing Guide

Printing	230 stainless steel mesh 0.5 mil emulsion thickness
Curing	Standard: 10 minutes @ 140 °C Longer curing times will typically give higher PTC response rate. Curing temperatures recommended 120 – 200°C.
Thickness	1 layer 8 – 14 µm cured film thickness
Coverage	≈ 310 - 350 cm ² /g
Thinner	RV-372

The descriptions and engineering data shown here have been compiled by Heraeus using commonly-accepted procedures, in conjunction with modern testing equipment, and have been compiled as according to the latest factual knowledge in our possession. The information was up-to date on the date this document was printed (latest versions can always be supplied upon request). Although the data is considered accurate, we cannot guarantee accuracy, the results obtained from its use, or any patent infringement resulting from its use (unless this is contractually and explicitly agreed in writing, in advance). The data is supplied on the condition that the user shall conduct tests to determine materials suitability for particular application. The Heraeus logo and Heraeus, figurative mark are trademarks or registered trademarks of Heraeus Holding GmbH or its affiliates. All rights reserved.

PTC4980

Polymer Thick Film

Warranty

Material guaranteed to meet specifications for 6 months from date of shipment.

Handling and Precautions

- Use in a well-ventilated area.
- In general, avoid contact with skin.
- Wash with soap and water.
- For cleanup of uncured material, RV-372 followed by acetone is recommended.

Storage

- Paste should be stored at 8 – 28 °C in a dry place out of direct sunlight. Complete spatulating or speed mixing recommended to ensure homogenization before use.
- DO NOT REFRIGERATE
- Allow paste to come to room temperature prior to opening. Spatulate well before using, as settling may occur during storage.

Americas

Phone +1 610 825 6050
electronics.americas@heraeus.com

Asia Pacific

Phone +65 6571 7649
electronics.apac@heraeus.com

China

Phone +86 53 5815 9601
electronics.china@heraeus.com

Europe, Middle East and Africa

Phone +49 6181 35 4370
electronics.emea@heraeus.com

The descriptions and engineering data shown here have been compiled by Heraeus using commonly-accepted procedures, in conjunction with modern testing equipment, and have been compiled as according to the latest factual knowledge in our possession. The information was up-to date on the date this document was printed (latest versions can always be supplied upon request). Although the data is considered accurate, we cannot guarantee accuracy, the results obtained from its use, or any patent infringement resulting from its use (unless this is contractually and explicitly agreed in writing, in advance). The data is supplied on the condition that the user shall conduct tests to determine materials suitability for particular application. The Heraeus logo and Heraeus, figurative mark are trademarks or registered trademarks of Heraeus Holding GmbH or its affiliates. All rights reserved.